



North Sails

Adams 10 Tuning guide


November 2019

Base settings for 10 TWS

	Forestay	Caps		Lower	
Arc	1516 mm	Port	Stb	Port	Stb
mm					
Loos gauge	17	29	29	9	9

Suggested settings all turns from base settings

TWS	Forestay	Caps	Lowers
<8	-5	-1	-2
10	Base	Base	Base
14	Base	+2	+1
16	Base	+3	+1
18+	Base	+4	+2

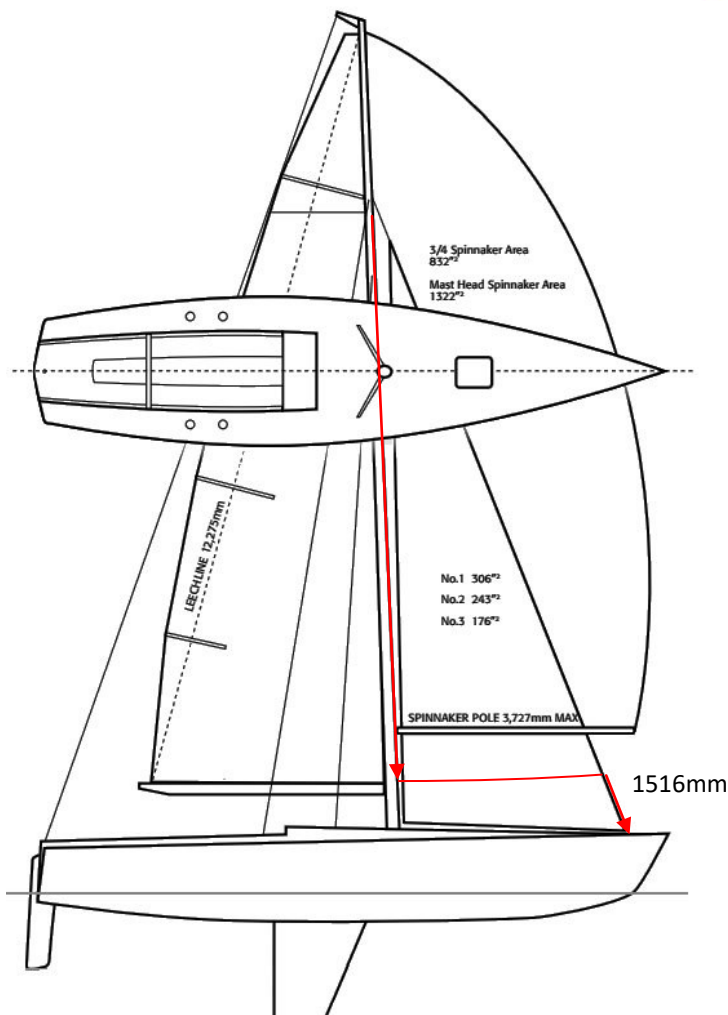

1. Set correct rake by swing an arc with the jib halyard from top of boom to forestay and the measure from that point to deck 1516mm
2. Set Cap shrouds to 29 on a Loos PT2 gauge. Ensure rig is same side to side by measuring down to chain plates with a tape measure hoisted the jib halyard
3. Set lowers to 9 on rig gauge. With no backstay on forestay should now read 17
4. Go sailing and check mast is the same tack to tack. Small adjustments may be needed on the D's to ensure this
5. Fine tune mast step to ensure your prebend matches your mainsail. We are looking for an even bend top to bottom
6. Adams 10 can vary between boats. If you have any questions about your particular set up please contact alby.pratt@northsails.com

Good sailing!

NORTH SAILS